

CUTPRO®
by NOR*FAB



CUTPRO™ VINTAGE

Norfab's new CutPro™ Vintage line of woven fabrics with Twaron® Premium yarn provides high levels of cut and puncture resistance with an appearance reminiscent of vintage workwear. CutPro™ Vintage combines the strength, high thermal capability, cut resistance and durability of Teijin Twaron® with the hardness of stainless steel. The unique composition of CutPro™ Vintage provides outstanding protection against hazards posed by sharp objects and revolving or reciprocating blades.

Garments made with CutPro™ Vintage fabric provide:

- ANSI/ISEA 105-2016 Level A6 Cut Protection, Level 3 Puncture Resistance, Level 2 Abrasion Resistance
- 100% inherent flame resistance that will never wash out or wear out
- Unique visual appearance

About NOR*FAB Corporation

NOR*FAB manufactures textile products using flame resistant synthetic fibers suited for use at high temperatures and for personal protection. These items include broad woven roll goods and narrow products in the form of woven and knitted tapes, sleeving, rope, and gasketing. NOR*FAB uses para-aramid, meta-aramid, melamine, phenolic, oxidized PAN, flame resistant rayon, polybenzimidazole, and other technical fibers blended into unique yarns which provide high levels of heat protection and insulation.

NOR*FAB produces many of these yarns on the DREF Spinning System for use in the weaving, knitting, gasket, and wire & cable industries. NOR*FAB possesses the largest collection of DREF III spinning frames of any yarn manufacturer in the world.

Among its offerings, NOR*FAB boasts fabric lines for the following end uses:

Firefighting

OMNI Vantage™, OMNI Elite®, OMNI 45™, and OMNI Quilt™

Electric Arc Protection

NF Arc™, ArcWeld®

Welding Protection


ArcWeld®

Cut Protection

CutPro®

Since 1979

Proud American Manufacturers of Flame Resistant Textiles

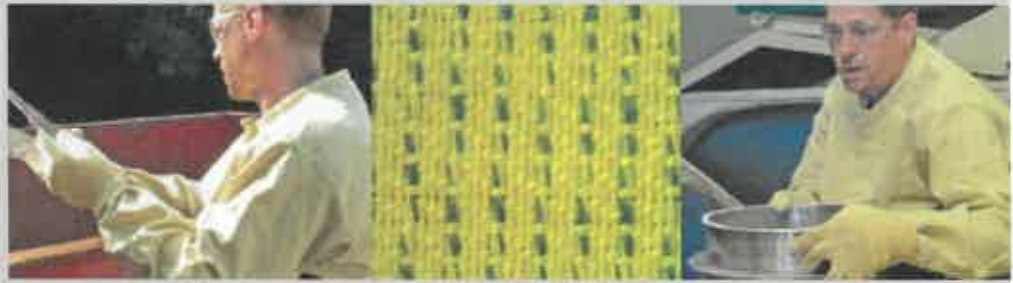

Cut Protection Data Sheet

Fabric Style	10TT366-60-00
Base Fabric	Twaron®/Stainless Steel Wire
Color/Appearance	Yellow with stripe
Weave Style	Twill
Weight oz/yd²	9.5 +/-7%
Fabric Thickness, inches	.026 +/--.005
Tensile Strength ASTM D5034, (Grab) (W&F), Lbs.	500 x 400
Cut Resistance (ANSI/ISEA 105-2016)	Level A6
Puncture Resistance (ANSI/ISEA 105-2016)	Level 3
Abrasion Resistance (ANSI/ISEA 105-2016)	Level 2
Cut Resistance (EN388: 2016)	Level E
Puncture Resistance (EN388: 2016)	Level 2

All data intended as general information and no warranties, guarantees, or claims of fitness for use are expressed or implied by NOR*FAB Corp. 1112



1310 Stanbridge Street,

Box 830, Norristown, PA 19404-0830 U.S.A.

Tel: 610-275-7270 • 800-441-9680 • Fax: 610-277-6106

Email: sales@norfab.com • www.norfab.com

